
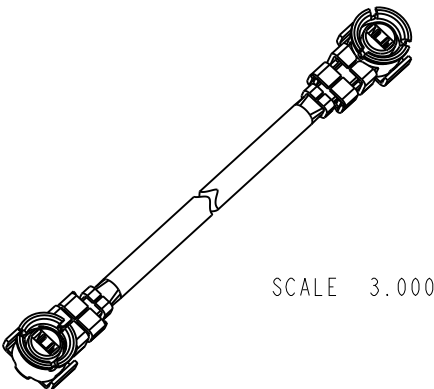
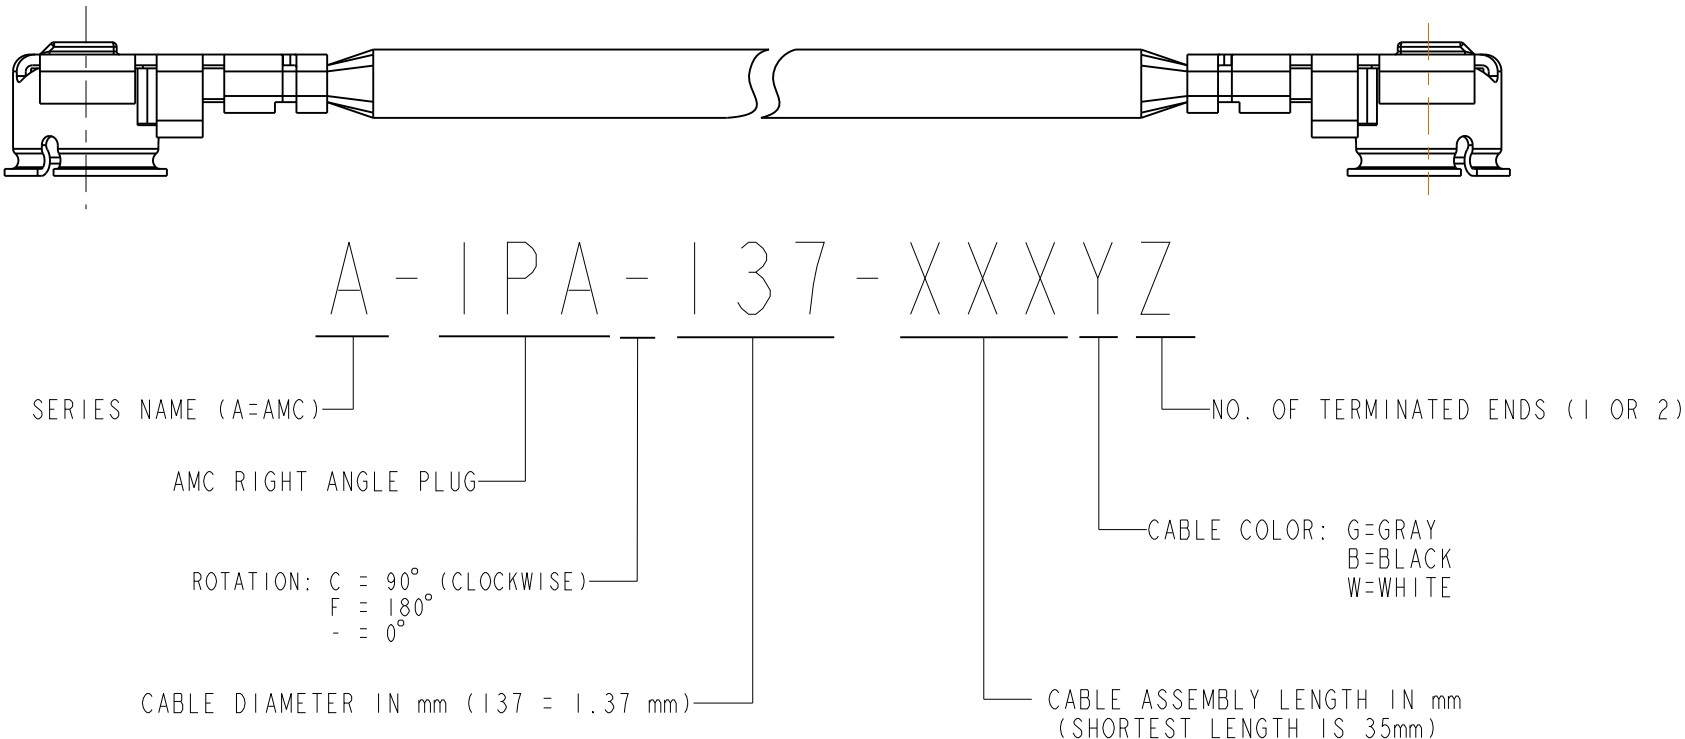
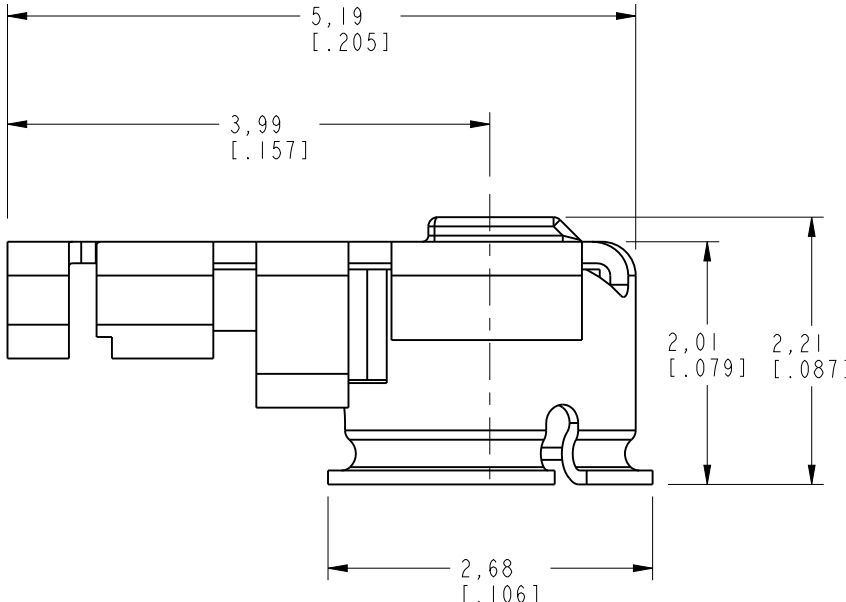


NOTES: 1. ELECTRICAL: A. IMPEDANCE: 50Ω (NOMINAL) B. FREQUENCY RANGE: 0-6 GHz C. CONTACT RESISTANCE: CENTER: 20mΩ MAX.: MEASURED AT 10mA MAX. 25 mΩ MAX AFTER CYCLING OUTSIDE: 10mΩ MAX. 15 mΩ MAX AFTER CYCLING D. INSULATION RESISTANCE: 500mΩ MIN.: MEASURED AT 100 VDC. E. WITHSTANDIN VOLTAGE: NO LINE OR INSULATION BREAKDOWN: 200 VAC FOR 1 MIN. F. V.S.W.R. : 1.3 MAX. AT DC TO 3GHz, 1.4 MAX. AT 3 TO 6GHz 2. PHYSICAL: A. FEMALE CONTACT HOLDING FORCE: .15N MIN. : MEASURED WITH A Ø.475MM PIN GAUGE. B. DURABILITY: 30 CYCLES C. TEMPERATURE RANGE: -40°C TO +90°C. D. AMC CONNECTOR MATING FORCE: 15N TYPICAL E. AMC CONNECTOR DEMATING FORCE: 10N TYPICAL F. AMC INTERFACE IS FULLY COMPATIBLE WITH "U.FL" SERIES PRODUCT. 3. MATERIALS AND FINISHES: CONNECTOR BODY: PHOSPHOR BRONZE, SILVER PLATED (.08u MIN.) OVER COPPER (1-2u) CONNECTOR CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED (0.2u MIN.) OVER NICKEL (2-3u) CONNECTOR INSULATOR: PBT CABLE JACKET: FEP CABLE DIELECTRIC: FEP CABLE CENTER CONDUCTOR: ANNEALED COPPER WIRE STRANDED, SILVER PLATED CABLE OUTER CONDUCTOR: ANNEALED COPPER WIRE BRAID, SILVER PLATED	A-IPA-137-XXXYZ		REVISIONS																
	DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR													
	THIRD ANGLE PROJ. 	A	RELEASE TO MFG	2/25/05	45421	BCG													
		B	CABLE DIA CALLOUT WAS 113 = 1.13MM	3/13/12	48945	CPM													
			<table><tr><th colspan="2">CABLE ASSEMBLY OVERALL LENGTH TOLERANCE</th></tr><tr><th>OVERALL LENGTH L (mm)</th><th>STANDARD TOLERANCE (mm)</th></tr><tr><td>35<L<200</td><td>± 4</td></tr><tr><td>200 < L 500</td><td>± 8</td></tr><tr><td>500 < L 1000</td><td>± 12</td></tr><tr><td>1000 < L</td><td>±1.5 %</td></tr></table>					CABLE ASSEMBLY OVERALL LENGTH TOLERANCE		OVERALL LENGTH L (mm)	STANDARD TOLERANCE (mm)	35<L<200	± 4	200 < L 500	± 8	500 < L 1000	± 12	1000 < L	±1.5 %
CABLE ASSEMBLY OVERALL LENGTH TOLERANCE																			
OVERALL LENGTH L (mm)	STANDARD TOLERANCE (mm)																		
35<L<200	± 4																		
200 < L 500	± 8																		
500 < L 1000	± 12																		
1000 < L	±1.5 %																		
																			
			AMC RIGHT ANGLE PLUG																
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°	MATERIAL	DRAWN	DATE	TITLE		Amphenol RF Danbury, CT, USA Tainan, Taiwan Shenzhen, China www.amphenolrf.com													
		B.C. GLEISSNER	16-Jan-04																
	REFERENCE	ENGINEER	DATE																
		B.C. GLEISSNER	16-Jan-04																
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	EAR# 1152 GEN# CASSY68	APPROVED	DATE	AMC PLUG TO AMC PLUG JUMPER ASSEMBLY		SCALE: 8.0:1													
		O. BARTHELMES	2/23/05			SHEET 1 OF 1													
		CAD FILE		CODE ID	DWG SIZE	DRAWING NO.	REV												
			I:\AMC\A-IPA-137-XXXYZ	74868	B	A-IPA-137-XXXYZ	B												