


DE2E3KY472MB3BM02

"# " indicates a package specification code.

< List of part numbers with package codes > DE2E3KY472MB3BM02

Shape

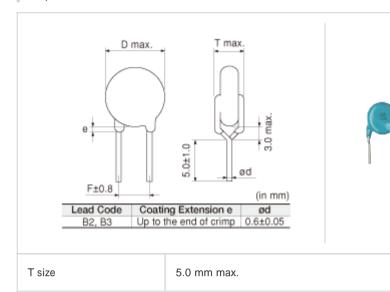

X1/Y2 Class Certified Products			
References			
Packaging	Specifications	Minimum quantity	

Specifications

Capacitance	4700pF ±20%
Rated voltage	250Vac(r.m.s.)
Temperature characteristics (complied standard)	E(JIS)
Capacitance change rate	+20/-55%
Temperature range of temperature characteristics	-25 to 85
Operating temperature range	-25 to 125

1 of 1

🔔 Attention

 This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it 's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



URL : http://www.murata.co.jp/

Last updated: 2013/11/16