muRata Capacitor data sheet

GRM3195C1H153JA01#

"#" indicates a package specification code.










< List of part numbers with package codes > GRM3195C1H153JA01D , GRM3195C1H153JA01J

Shape





L size 3.2 ± 0.15 mm W size 1.6 ± 0.15 mm 0.85 ± 0.1 mm T size External terminal width e 0.3 to 0.8mm 1.5mm min. Distance between external terminals g Size code in mm(inch) 3216 (1206)

Specifications

Capacitance Rated voltage Temperature characteristics (complied standard) Temperature coefficient

Temperature range of temperature characteristics

Operating temperature range

15000pF ±5% 50Vdc COG(EIA) 0 ± 30ppm/ 25 to 125 -55 to 125

References

Packag	ging	Specifications Minimum quantity
D	180mm Paper taping	4000
J	330mm Paper taping	10000
		Mass (typ.)
1 piece		19mg
180mm Reel	l	191g

1 of 2

🔔 Attention

- 1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it 's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.




muRata Murata Manufacturing Co., Ltd.

URL: http://www.murata.co.jp/


Last updated: 2013/10/20

Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

Frequency characteristics (ESR, Impedance)

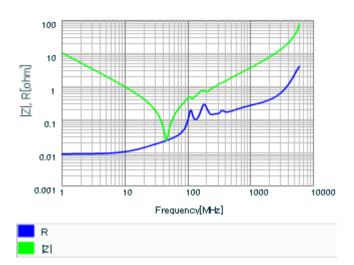


AC voltage characteristics

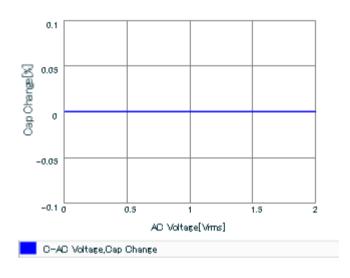


This PDF data has only typical specifications because there is no space for detailed specifications.

Therefore, please reviewour product specifications or consult the approval sheet for product specifications before ordering.

S parameter (Smith chart S11)



Capacitance - temperature characteristics



2 of 2



Last updated: 2013/10/20