



# ENFIS UNO Tag Array Neutral White

Smart, powerful, compact, efficient, reliable light

## Features & Benefits

- Intense, high-power Neutral White spot source
- Ultra-high power density
- Long-life and reliable, high-performance due to excellent thermal conductivity

## Outline Specification

- 1000lm Typical Luminous Flux
- 0.5cm<sup>2</sup> Aperture
- 2000lm/cm<sup>2</sup> Power density
- Input Power: 38W
- Typical thermal resistance <0.7°C/W

## Light Engine Integration

Enfis can eliminate the time, cost and risk of integration by offering our arrays as part of a complete light engine solution

## Thermal Management

Enfis arrays are designed to provide excellent thermal conductivity and to be integrated effectively with thermal hardware to ensure optimum performance and life

## Optics



Enfis Uno arrays provide excellent spot source with Lambertian emission characteristics. Enfis technical experts can advise a range of optical solutions to match your requirements.

## Power Management

Enfis provides a range of feature-rich, powerful drivers and power supplies for our arrays. Our applications team can provide you with a solution for your specific requirements.

## Applications & Markets

- General lighting
- Architectural lighting
- Retail lighting
- Entertainment lighting
- Fibre-optic illuminators
- Machine vision

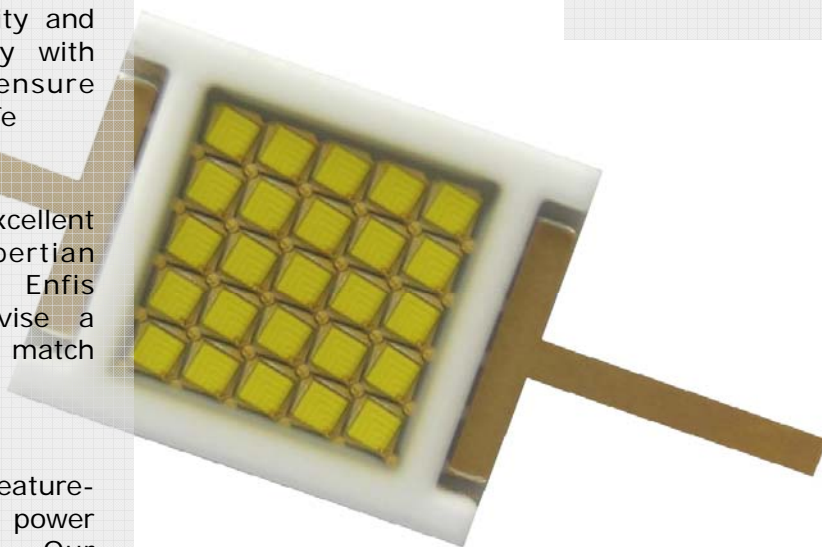




# ENFIS UNO Tag Array Neutral White




## Technical Specification

### Electro-Optical Characteristics

Item	Min	Typ	Max
Rated Current If (mA)		2350	
Forward Voltage Vf (Volts)	14	16	20
Colour Temperature CCT (K)	3900	4250	4600
Total Luminous Flux ΦL (Lumens)	900	1000	
Luminous Flux Density ΦL/A (lm/cm <sup>2</sup> )	1800	2000	
CRI (Ra)		76	
Total Electrical Power P (W)		38	

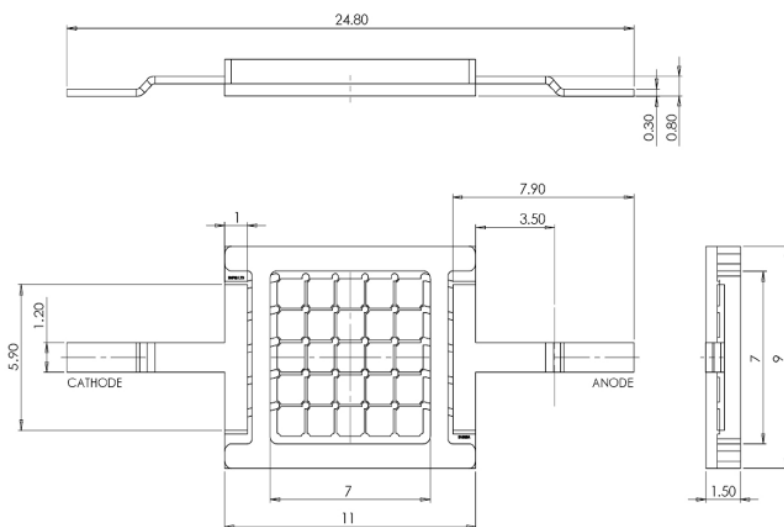

All measurements performed at a heatsink temperature of 25°C

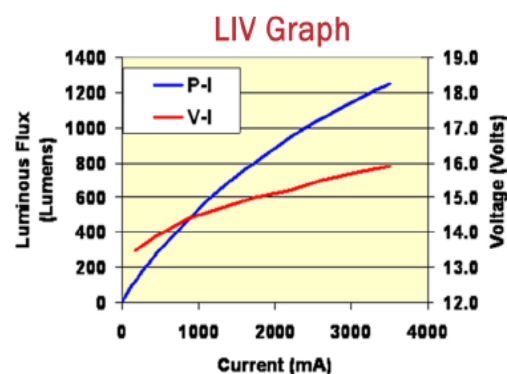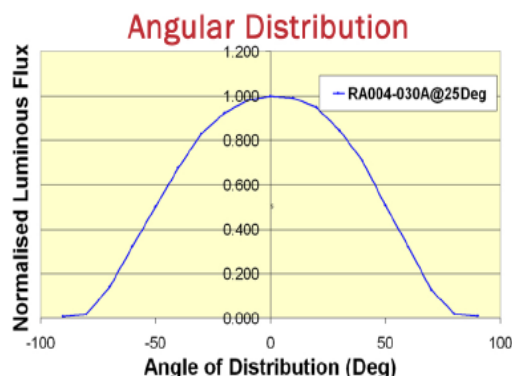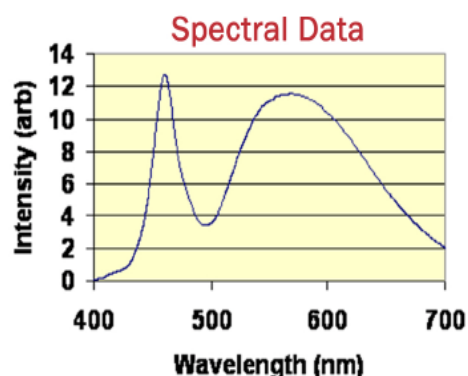

### Heat Generation

Proper thermal design of the end product is of paramount importance. The operational junction temperature of each LED chip should be kept below 125°C. Please contact Enfis for further support in this matter.

### Handling LED Array

Contact with the encapsulation on the surface of the LED array must be avoided to prevent damage. Do not apply pressure to the encapsulation or allow it to come into contact with sharp objects. During operation the encapsulation will be hot and contact should be avoided.

### Static Electricity

Care must be taken when handling, these products are sensitive to static electricity. Observe static handling precautions.



### Cleaning

Avoid touching the LED array surface. To clean—BLOW surface with either dry air or nitrogen gas.

### Eye Safety Precautions

The light output of the products may cause injuries to human eyes in circumstances where the products are viewed directly with unshielded eyes for more than a few seconds.

Please refer to IEC 60825-1:2001 for further information

