


DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEMAAKT AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS DE TERUGZENDING VERPLICHT.

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT. AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE


05

BS, A , 201458, 006

WIRING FACE

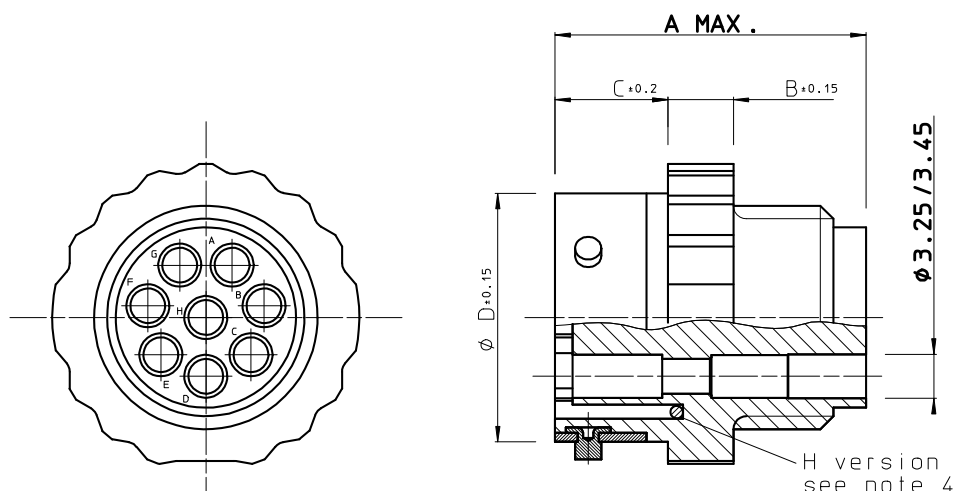

MATING FACE

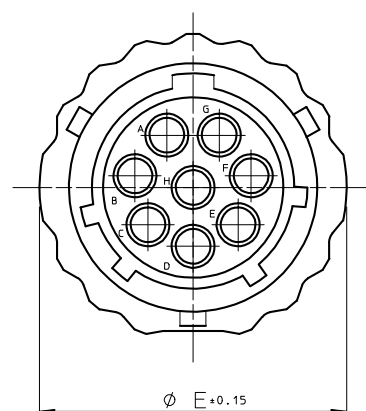

CAT. NUMBER	A MAX.	B ±0.15	C ±0.2	Ø D ±0.15	Ø E ±0.15
UTG1103S(H) VDE	27.6	5.0	8.65	15.0	19.5
UTG1104S(H)	24.3	5.0	8.65	15.0	19.5
UTG1125S(H)	24.3	5.0	8.65	19.0	23.5
UTG1128S(H)	24.3	5.0	8.65	19.0	23.5
UTG11412S(H)	24.3	5.0	8.65	22.2	27.0
UTG11619S(H)	24.3	5.0	8.65	25.3	30.0
UTG11823S(H)	24.3	5.0	8.65	28.5	36.5
UTG12028S(H)	27.0	5.0	12.05	31.7	36.5
UTG12235S(H)	28.0	5.0	12.05	34.9	39.7
UTG12448S(H)	30.4	5.0	13.85	38.0	42.5
* NOTE 4					

MATERIAL

UTG1128S AS SHOWN


- BODY : GLASS-FILLED POLYESTER UL94-V0
COLOUR : BLACK.
- TRILOK RING : HIGH STRENGTH CuZn ALLOY,
NICKEL PLATED.

PERFORMANCE CHARACTERISTICS


- OPERATING TEMPERATURE : -55 °C TO +125 °C.
- INSULATION RESISTANCE : 5000 M Ohm MIN.
- TEST POTENTIAL : 2000 V EFF.

NOTES

- 1.CONNECTOR ACCEPTS # 16 STRIP FORMED SOCKET, MACHINED SOCKET AND SUBMINIATURE COAXIAL PIN AND SOCKET CONTACTS.
- 2.CONTACTS TO BE ORDERED SEPARATELY : REFER TO TRIM - TRIO CATALOG.
- 3.FOR OTHER INSERT ARRANGEMENTS SEE BS,C ,201458,000
- 4.FOR WATERPROTECTED VERSION: ADD "H" TO THE CAT.NO. E.G. CAT.NO.: UTG1128SH

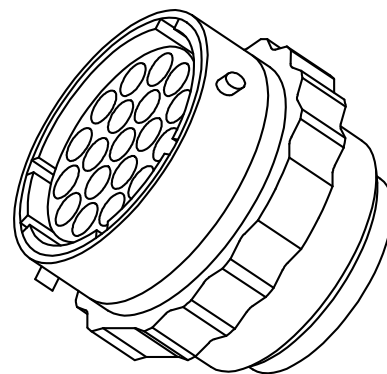

GEN. ST.	01		02		03		04		05		06		07		08		0D		50		60		70		80		90				
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88

1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1° HOEKEN	APPR.	DATE	SIGN.	FEMALE RECEPTACLE FREE HANGING														
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.	DRAFT	7-6-91	M BUEDS	CAT. No. UTG1---S(H)														
	CHECKED			 SOURIAU Connection Technology	SOURIAU					SCALE								
	PROD. MGR.				Route Nationale 23													
ALL DIMENSIONS IN MM	PR.ENG.MGR.			72470 CHAMPAGNE														
	PR.MGT.MGR.			REFERENCES / REFERENTIES														
ALLE AFMETINGEN IN MM				BS , A , 201458 , 006					05									
				DRAWING NR.					CUSTOMER DRAWING					REVISION				