

## Ceramic Singlelayer DC Disc Capacitors, 6 kV<sub>DC</sub> General Purpose



### QUICK REFERENCE DATA

DESCRIPTION	VALUE	
Ceramic Class	1	2
Ceramic Dielectric	N750, Y5T, Y5U	
Voltage (V <sub>AC</sub> )	6000	
Min. Capacitance (pF)	10	56
Max. Capacitance (pF)	330	6800
Mounting	Radial	

### MARKING

Marking indicates, capacitance, tolerance code, and rated voltage.

### OPERATING TEMPERATURE RANGE

-40 °C to +85 °C

### TEMPERATURE CHARACTERISTICS

Class 1 N750 (U2J)

Class 2 Y5T, Y5U

### SECTIONAL SPECIFICATIONS

Climatic category (according to EN 60068-1):

40/085/21

### FEATURES

- High capacitance in small sizes
- Low losses
- Wide range of different leadstyles
- Material categorization:

For definitions of compliance please see

[www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



**RoHS**  
COMPLIANT

### APPLICATIONS

- Lighting ballasts
- SMPS

### DESIGN

The capacitors consist of ceramic disc both sides of which are silver plated. Connection leads are made of tinned copper having diameters of 0.6 mm or 0.8 mm.

The capacitors may be supplied with straight or kinked leads having a lead spacing of 12.5 mm.

Coating is made of blue colored flame retardant epoxy resin in accordance with UL 94 V-0.

### CAPACITANCE RANGE

10 pF to 6.8 nF

### RATED VOLTAGE

6 kV<sub>DC</sub>

### DIELECTRIC STRENGTH

9000 V<sub>DC</sub>, 2 s Component test

### INSULATION RESISTANCE AT 500 V<sub>DC</sub>

≥ 10 000 MΩ (60 s)

### TOLERANCE ON CAPACITANCE

± 10 %, ± 20 %

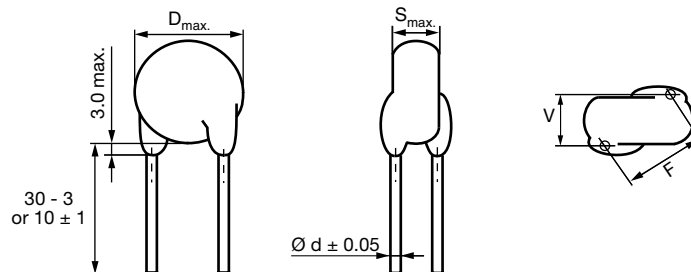
### DISSIPATION FACTOR

Class 1:

$C < 30 \text{ pF: } \left( \frac{100 \text{ pF}}{C} + 0.7 \right) \times 10^{-4} \text{ max. (1 MHz)}$

$C \geq 30 \text{ pF: Max. 0.1 \% (1 MHz)}$

Class 2: Max. 2.5 % (1 kHz)

**DIMENSIONS** in millimeters**ORDERING INFORMATION**

ORDERING INFORMATION								
CAPACITANCE (pF)	TOLERANCE (%)	BODY DIAMETER D <sub>max.</sub> (mm)	BODY THICKNESS S <sub>max.</sub> (mm)	LEAD SPACING <sup>(1)</sup> F (mm) ± 1 mm	LEAD DIAMETER <sup>(1)</sup> d (mm) ± 0.05 mm	WIDTH <sup>(1)</sup> V (mm) ± 0.5 mm	ORDERING CODE	
							MISSING DIGITS SEE ORDERING CODE BELOW	
N750 (U2J)								
10	± 10	7.0	4.8	12.5	0.6	2.2	HFU100KBF...KR	
15							HFU150KBF...KR	
22							HFU220KBF...KR	
33							HFU330KBF...KR	
47							HFU470KBF...KR	
68		12.0	5.2		0.8	2.4	HFU680KBF...KR	
82							HFU820KBF...KR	
100							HFU101KBF...KR	
150							HFU151KBF...KR	
220							HFU221KBF...KR	
330		20.0					HFU331KBF...KR	
Y5T (2E3)								
56	± 20 <sup>(2)</sup>	7.0	5.0	12.5	0.6	3.5	HFZ560.BF...KR	
68							HFZ680.BF...KR	
82							HFZ820.BF...KR	
100							HFZ101.BF...KR	
120		8.0					HFZ121.BF...KR	
150							HFZ151.BF...KR	
180							HFZ181.BF...KR	
220							HFZ221.BF...KR	
270		10.0					HFZ271.BF...KR	
330							HFZ331.BF...KR	
390							HFZ391.BF...KR	
470							HFZ471.BF...KR	
560		13.0					HFZ561.BF...KR	
680		15.0					HFZ681.BF...KR	
820							HFZ821.BF...KR	
1000					0.8		HFZ102.BF...KR	
1200		HFZ122.BF...KR						
1500		HFZ152.BF...KR						
1800		HFZ182.BF...KR						
2200		HFZ222.BF...KR						
2700		25.0					HFZ272.BF...KR	

**ORDERING INFORMATION**

ORDERING INFORMATION							
CAPACITANCE (pF)	TOLERANCE (%)	BODY DIAMETER D <sub>max.</sub> (mm)	BODY THICKNESS S <sub>max.</sub> (mm)	LEAD SPACING <sup>(1)</sup> F (mm) ± 1 mm	LEAD DIAMETER <sup>(1)</sup> d (mm) ± 0.05 mm	WIDTH <sup>(1)</sup> V (mm) ± 0.5 mm	ORDERING CODE
							MISSING DIGITS SEE ORDERING CODE BELOW
Y5U (2E3)							
150	± 20	7.0	5.0	12.5	0.6	3.5	HFE151MBF...KR
220							HFE221MBF...KR
330							HFE331MBF...KR
470		HFE471MBF...KR					
680		HFE681MBF...KR					
1000		HFE102MBF...KR					
1500		11.0	5.5		HFE152MBF...KR		
2200					HFE222MBF...KR		
3300					HFE332MBF...KR		
4700					HFE472MBF...KR		
6800					HFE682MBF...KR		

**Notes**



(1) Standard lead configuration, other lead spacing and diameter available on request

(2) ± 10 % available on request

**ORDERING CODE**

.	7 <sup>th</sup> digit	Capacitance tolerance	± 10 % = K, ± 20 % = M				
...	10 <sup>th</sup> to 12 <sup>th</sup> digit	Lead configuration	see "General Information"				
<b>Example</b>	<b>HFE</b>	<b>682</b>	<b>M</b>	<b>BF</b>	<b>EF0</b>	<b>K</b>	<b>R</b>
	Series	Capacitance value	Tolerance code	Voltage code	Lead configuration	Internal code	RoHS compliant

**MARKING**

 <p>n33 K 6 kV D</p> <p>HFU 10 pF to 100 pF HFZ 150 pF to 470 pF HFE 150 pF to 1.0 nF</p>	 <p>4n7 M</p> <p>HFU 150 pF to 330 pF HFZ 560 nF to 2.7 nF HFE 1.5 nF to 6.8 nF</p>
--	---

**RELATED DOCUMENTS**

General Information	<a href="http://www.vishay.com/doc?22001">www.vishay.com/doc?22001</a>
---------------------	--



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**